

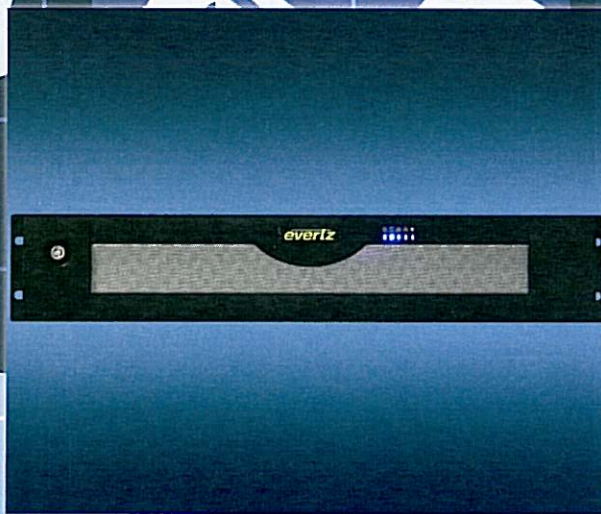
A supplement to

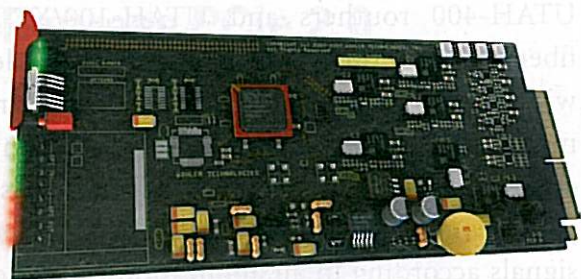
BroadcastEngineering®

SEPTEMBER 2011 — WORLD EDITION

IBC2011

PRODUCT SOURCE



CAPTIONING/SUBTITLING**Wohler HDCC series**

HDCC series captioning/subtitling products allow users to handle encoding, decoding and monitoring of CEA-608, CEA-708 and B37 captions, as well as encoding and decoding multiple synchronous GPI triggers; flexible HDCC card design allows broadcasters to choose the functionality that best suits their application's requirements at a competitive price point.

www.wohler.com
Stand: 8.D56, 0E225

ROBOTIC HEAD**Vinten Radamec Fusion FHR-35**

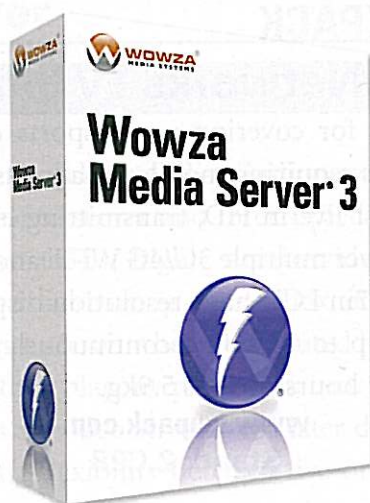
Pan-and-tilt head incorporates Intelligent Control Engineering (ICE); designed for payloads up to 16 kg; uses Ethernet to connect to HDVRC studio robotics controller or legislative system controller; internal motors and processing allow unit to achieve pan-and-tilt accuracy better than 0.01 degrees; no external interface boxes or power supplies are required.

www.vintenradamec.com
Stand: 11.D61

ON-CAMERA MONITOR**Ikan VL5**

5in HDMI monitor with resolution of 800 x 480; includes peaking, underscan, switchable aspect ratio and aspect ratio guides, blue gun, RGB adjustability, native Canon EOS 5D live view output and 480i/p, 576i/p, 720p, 1080i/p signal input; comes with 12VDC adapter, as well as a choice of Sony, Panasonic or Canon DV battery adapter plate; includes a sun visor for clarity in the field.

www.ikancorp.com
Stand: 9.B47

STREAMING SOLUTION**Wowza Media Server 3**

Is a single extensible foundation for "any screen done right" media delivery of the best possible viewing experience where and when it's wanted; designed to make simple and cost-effective formerly hard-to-implement features such as adaptive bitrate streaming, time-shifted playback and integrated rights management.

www.wowzamedia.com
Stand: 13.121

DISC LIBRARY**Sony XDJ-1000**

Holds multiple XDCAM disc drives, automated robotic and library control software in a compact chassis; supports up to 30 128GB discs; supports all models of XCCAM professional discs, including Quad layer QL 128GB; equipped with web application software for simple ingest/archive operation that can be controlled from a web browser; standard configuration includes one drive, disc bin and power supply.

www.sony.co.uk
Stand: 12.A10

SCHEDULING/MAM**MediaGeniX WHATS'On Generation 4**

Fully integrates VOD in the companywide multimedia scheduling process; new transaction system, based on active change propagation, automatically updates user screens in real time; provides chat functionality, presence registry, collision detection and transaction merging.

www.mediagenix.tv
Stand: 3.C59

SIGNAL TRANSPORT**Grass Valley 3G Transmission**

Available in either triax or fiber versions; can accommodate any 1.5Gb/s and 3Gb/s format, while allowing users to utilize the same LDK 8000 Elite or LDK 4000 Elite camera heads for either of the two infrastructures; 3G triax or fiber module snaps on the back of the camera's head, and the operator is ready to work; system allows any choice of transmission cable to carry either 1080i, 720p or 1080p50/60 HD video (along with a full set of transmission features and diagnostics); also ready for multiplexed pairs of 720p or 1080i HD signals for stereoscopic 3-D applications.

www.grassvalley.com
Stand: 1.E02, 1.D11, 0E301

DVI MATRIX SWITCH**Guntermann & Drunck DVICenter**

DVI matrix switch is designed to optimize studio workflow; offers a centralized configuration through a web interface or OSD; provides multiple users with access to a series of computers using different platforms simultaneously; provides a high resolution of 1920 x 1200 at 60Hz over distances of up to 280m by CAT cabling and up to 10km by fiber optics.

www.gdsys.de
Stand: 4.B74